


FEATURES

- Ultral wide input range: 34-160VDC
- Single and bipolar outputs: 5, 12, 15, 24Volts DC
- 5W isolated output
- Efficiency up to 87%
- Six sides shielding
- Build-in EMI filter and input anti-reverse options
- Remote on/off control
- 1.5KVAC I/O isolation
- Operation case temperature: -40°C to +105°C
- Standard 1.0"×1.0"×0.4" DIP footprint, Din-rail & wall mount type options
- Extensive self-protection, UVLO, OTP, OVP, OCP and short-circuit protection
- Outstanding thermal dissipation
- Fully encapsulated, high reliability
- MTBF ≥ 1 MHRs
- Compliance with EN50155 standard

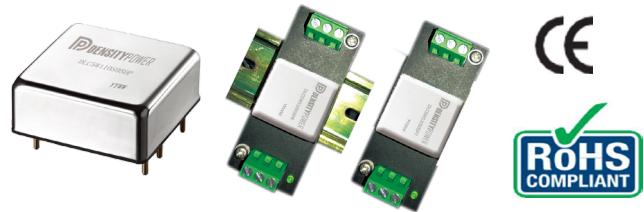

PRODUCT OVERVIEW

The DLC5W110 series use advanced power processing, control and packaging technologies to provide the high performance, flexibility, reliability and cost effectiveness of a mature power converter. Ultral wide range input of 34-160V (110V nominal) that complies with the European EN50155 standard for electronic equipment used on railway rolling stock. Fully encapsulated package technology provides outstanding thermal, vibration & shock performance, is ideal for railway applications where power modules must meet rugged environment requirements.


A wealth of self-protection features included input undervoltage lockout, over temperature shutdown, over current protection with "hiccup" autorestart technique, provides indefinite short-circuit protection, along with output OVP. The operation temperature is -40°C to 85°C, the module delivers full output power @ 105°C case temperature.

The DLC5W110 series are designed to railway standards EN 50155.

Models Selections

| Basic Models | Input Voltage [VDC] | Input Voltage Range [VDC] | Output Voltage [VDC] | Output Current [A] | Efficiency Typ. [%] | Capacitive Load Max. [µF] | Package [inch] |
|--------------|---------------------|---------------------------|----------------------|--------------------|---------------------|---------------------------|-------------------|
| DLC5W110S05 | 110 | 34-160 | 5 | 1.00 | 84 | 1500 | 1"×1"×0.4" DIP |
| DLC5W110S12 | 110 | 34-160 | 12 | 0.42 | 86 | 600 | |
| DLC5W110S15 | 110 | 34-160 | 15 | 0.34 | 87 | 470 | |
| DLC5W110S24 | 110 | 34-160 | 24 | 0.21 | 87 | 220 | |

Model Numbering

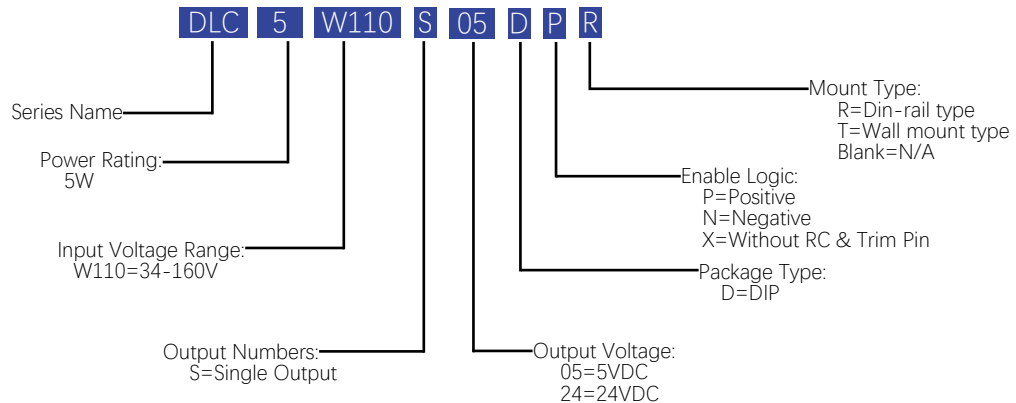

Absolute Maximum Ratings

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|-----------------------------------|----------------------|------|------|------|-------|
| Input Voltage Continuous | | -0.5 | | 160 | VDC |
| Input Voltage Transient | < 100ms | | | 180 | VDC |
| On/Off Remote Control | Referred to -Vin | | | 40 | VDC |
| Remote Control Source Current | | 0 | | 1.5 | mA |
| Remote Control Sink Current | | 0 | | 1.5 | mA |
| Operating Case Temperature | | -40 | | 105 | °C |
| Operating Environment Temperature | With derating | -40 | | 85 | °C |
| Storage Temperature Range | | -55 | | 125 | °C |
| Soldering Temperature | Wave soldering < 10s | | | 260 | °C |
| Cooling | Free air convection | | | | |

Safety and EMC Compliance

| | | | |
|--------------------------|------------------|---------------|-----------------------------------|
| Conducted Emission | EN50121-3-2 | | With external filter |
| Radiated Emission | EN50121-3-2 | | With external filter |
| Conducted Susceptibility | IEC6100-4-6 | | 10Vrms Criteria A |
| Radiated Susceptibility | IEC6100-4-3 | | 20V/m Criteria A |
| EFT | IEC6100-4-4 | ±2KV | Criteria A (With external filter) |
| Surge | IEC6100-4-5 | ±2KV | Criteria A (With external filter) |
| ESD | IEC6100-4-2 | Contact: ±6KV | Air: ±8KV Criteria A |
| Isolation Safety Rating | Basic insulation | | |

| Input Specifications | | | | | |
|--|--|--------------------------------|------|------|-------|
| Parameters | Conditions | Min. | Typ. | Max. | Units |
| Operating Voltage Range | | 34 | 110 | 160 | VDC |
| Start-up Threshold | | 31 | | 34 | VDC |
| Under Voltage Shutdown | | 30 | | 33 | VDC |
| Recommended Input Fuse | | | 0.5 | | A |
| General Specifications | | | | | |
| Parameters | Conditions | Min. | Typ. | Max. | Units |
| On/Off Remote Control | Positive Logic, On state | Open or $2.5 \leq V_r \leq 15$ | | | VDC |
| | Positive Logic, Off state | Short or $0 \leq V_r \leq 0.8$ | | | VDC |
| | Negative Logic, On state | Short or $0 \leq V_r \leq 0.8$ | | | VDC |
| | Negative Logic, Off state | Open or $2.5 \leq V_r \leq 15$ | | | VDC |
| Remote Control Current | | | 1.0 | 2.0 | mA |
| Isolation Voltage (Test for 1 minute) | Input to output | 1500 | | | VAC |
| | Input to case | 1500 | | | VAC |
| | Output to case | 1500 | | | VAC |
| Isolation Resistance (Viso=500VDC) | Input to output | 100 | | | MΩ |
| Isolation Capacitance | Input to output | | 220 | | pF |
| Switching Frequency | | | 300 | | KHz |
| Start-up Delay | From undervoltage shutdown recovery to 10% Vout | | 30 | | mS |
| Rise Time | From 10% Vout to 90% Vout capacitive load | | 30 | | mS |
| Vibration | IEC 60068-2-64, Environmental testing - Part 2 | | | | |
| Shock (Operational) | IEC 60068-2-27, Environmental Testing- Part 2.27 | | | | |

All specifications are tested at 25 °C ambient temperature, nominal input voltage, rated output current conditions unless otherwise specified.

Performance Data (5 Vout Model)

Input Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|------|------|------|----------|
| Input Reflected Ripple Current | Measured at input pin with 6.8 μ H inductor and 320 μ F capacitance | | 20 | | mA pk-pk |
| Input Current @ No Load | | | 13 | 20 | mA |
| Input Current @ Min. Line | | | | 0.5 | A |
| Power Loss @ No Load | | | | 0.5 | W |
| Recommended External Input Capacitance | 1 μ F CBB and 100 μ F E-cap used in combination | | 100 | | μ F |

Output Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|------|------|------|--------------------------|
| Output Voltage Setpoint | Nom.line, 50% load | 4.95 | 5 | 5.05 | VDC |
| Vout Accuracy | | -1 | | +1 | % |
| Line Regulation | Vin from min. line to max. line, 50% load | -0.2 | | +0.2 | % |
| Load Regulation | From min. load to full load, Vin=nom.line | -0.5 | | +0.5 | % |
| Temperature Coefficient | From -40 $^{\circ}$ C to 85 $^{\circ}$ C | | | 0.02 | % of Vout / $^{\circ}$ C |
| Total Regulation | | -2 | | +2 | % |
| Over Current Protection | Hiccup, auto-recover | 110 | | 200 | % |
| Over Voltage Protection | Hiccup, auto-recover | 110 | | 160 | % |
| Output Short Protection | Hiccup, auto-recover | | | | |
| Ripple & Noise Max. ^① | | | | 100 | mV Pk-Pk |
| Dynamic Load Peak Deviation ^② | | -5 | | +5 | % of Vout |
| Dynamic Load Response | within 1% band of Vout deviation | | | 100 | μ S |
| Capacitive Load | | 0 | | 1500 | μ F |
| Minimum Load | No minimum load required | | | | |

Notes

- ① Ripple & noise is tested with certain filter parameters, please see output ripple & noise in technical notes on page 12 for more details.
- ② Load is set from 50%-75%-50% of full load, di/dt=0.1A/ μ S, Cout=320 μ F.

Performance Data (12 Vout Model)

Input Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|------|------|------|----------|
| Input Reflected Ripple Current | Measured at input pin with 6.8 μ H inductor and 320 μ F capacitance | | 35 | | mA pk-pk |
| Input Current @ No Load | | | 13 | 20 | mA |
| Input Current @ Min. Line | | | | 0.5 | A |
| Power Loss @ No Load | | | | 0.5 | W |
| Recommended External Input Capacitance | 1 μ F CBB and 100 μ F E-cap used in combination | | 100 | | μ F |

Output Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|-------|------|-------|---------------|
| Output Voltage Setpoint | Nom.line, 50% load | 11.88 | 12 | 12.12 | VDC |
| Vout Accuracy | | -1 | | +1 | % |
| Line Regulation | Vin from min. line to max. line, 50% load | -0.2 | | +0.2 | % |
| Load Regulation | From min. load to full load, Vin=nom.line | -0.5 | | +0.5 | % |
| Temperature Coefficient | From -40°C to 85°C | | | 0.02 | % of Vout /°C |
| Total Regulation | | -3 | | +3 | % |
| Over Current Protection | Hiccup, auto-recover | 110 | | 200 | % |
| Over Voltage Protection | Hiccup, auto-recover | 110 | | 160 | % |
| Output Short Protection | Hiccup, auto-recover | | | | |
| Ripple & Noise Max. ^① | | | | 120 | mV Pk-Pk |
| Dynamic Load Peak Deviation ^② | | -5 | | +5 | % of Vout |
| Dynamic Load Response | within 1% band of Vout deviation | | | 250 | μ S |
| Capacitive Load | | 0 | | 600 | μ F |
| Minimum Load | No minimum load required | | | | |

Notes

- ① Ripple & noise is tested with certain filter parameters, please see output ripple & noise in technical notes on page 12 for more details.
- ② Load is set from 50%-75%-50% of full load, di/dt=0.1A/ μ S, Cout=320 μ F.

Performance Data (15 Vout Model)

Input Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|------|------|------|----------|
| Input Reflected Ripple Current | Measured at input pin with 6.8 μ H inductor and 320 μ F capacitance | | 35 | | mA pk-pk |
| Input Current @ No Load | | | 13 | 20 | mA |
| Input Current @ Min. Line | | | | 0.5 | A |
| Power Loss @ No Load | | | | 0.5 | W |
| Recommended External Input Capacitance | 1 μ F CBB and 100 μ F E-cap used in combination | | 100 | | μ F |

Output Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|-------|------|-------|---------------|
| Output Voltage Setpoint | Nom.line, 50% load | 14.85 | 15 | 15.15 | VDC |
| Vout Accuracy | | -1 | | +1 | % |
| Line Regulation | Vin from min. line to max. line, 50% load | -0.2 | | +0.2 | % |
| Load Regulation | From min. load to full load, Vin=nom.line | -0.5 | | +0.5 | % |
| Temperature Coefficient | From -40°C to 85°C | | | 0.02 | % of Vout /°C |
| Total Regulation | | -3 | | +3 | % |
| Over Current Protection | Hiccup, auto-recover | 110 | | 200 | % |
| Over Voltage Protection | Hiccup, auto-recover | 110 | | 160 | % |
| Output Short Protection | Hiccup, auto-recover | | | | |
| Ripple & Noise Max. ^① | | | | 150 | mV Pk-Pk |
| Dynamic Load Peak Deviation ^② | | -5 | | +5 | % of Vout |
| Dynamic Load Response | within 1% band of Vout deviation | | | 250 | μ S |
| Capacitive Load | | 0 | | 470 | μ F |
| Minimum Load | No minimum load required | | | | |

Notes

- ① Ripple & noise is tested with certain filter parameters, please see output ripple & noise in technical notes on page 12 for more details.
- ② Load is set from 50%-75%-50% of full load, di/dt=0.1A/ μ S, Cout=320 μ F.

Performance Data (24 Vout Model)

Input Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|------|------|------|----------|
| Input Reflected Ripple Current | Measured at input pin with 6.8 μ H inductor and 320 μ F capacitance | | 35 | | mA pk-pk |
| Input Current @ No Load | | | 13 | 20 | mA |
| Input Current @ Min. Line | | | | 0.5 | A |
| Power Loss @ No Load | | | | 0.5 | W |
| Recommended External Input Capacitance | 1 μ F CBB and 100 μ F E-cap used in combination | | 100 | | μ F |


Output Specifications

| Parameters | Conditions | Min. | Typ. | Max. | Units |
|--|---|-------|------|-------|--------------------------|
| Output Voltage Setpoint | Nom.line, 50% load | 23.76 | 24 | 24.24 | VDC |
| Vout Accuracy | | -1 | | +1 | % |
| Line Regulation | Vin from min. line to max. line, 50% load | -0.2 | | +0.2 | % |
| Load Regulation | From min. load to full load, Vin=nom.line | -0.5 | | +0.5 | % |
| Temperature Coefficient | From -40 $^{\circ}$ C to 85 $^{\circ}$ C | | | 0.02 | % of Vout / $^{\circ}$ C |
| Total Regulation | | -3 | | +3 | % |
| Over Current Protection | Hiccup, auto-recover | 110 | | 200 | % |
| Over Voltage Protection | Hiccup, auto-recover | 110 | | 160 | % |
| Output Short Protection | Hiccup, auto-recover | | | | |
| Ripple & Noise Max. ^① | | | | 240 | mV Pk-Pk |
| Dynamic Load Peak Deviation ^② | | -5 | | +5 | % of Vout |
| Dynamic Load Response | within 1% band of Vout deviation | | | 250 | μ S |
| Capacitive Load | | 0 | | 220 | μ F |
| Minimum Load | No minimum load required | | | | |

Notes


- ① Ripple & noise is tested with certain filter parameters, please see output ripple & noise in technical notes on page 12 for more details.
- ② Load is set from 50%-75%-50% of full load, di/dt=0.1A/ μ S, Cout=320 μ F.

Performance Data(5 Vout Model)

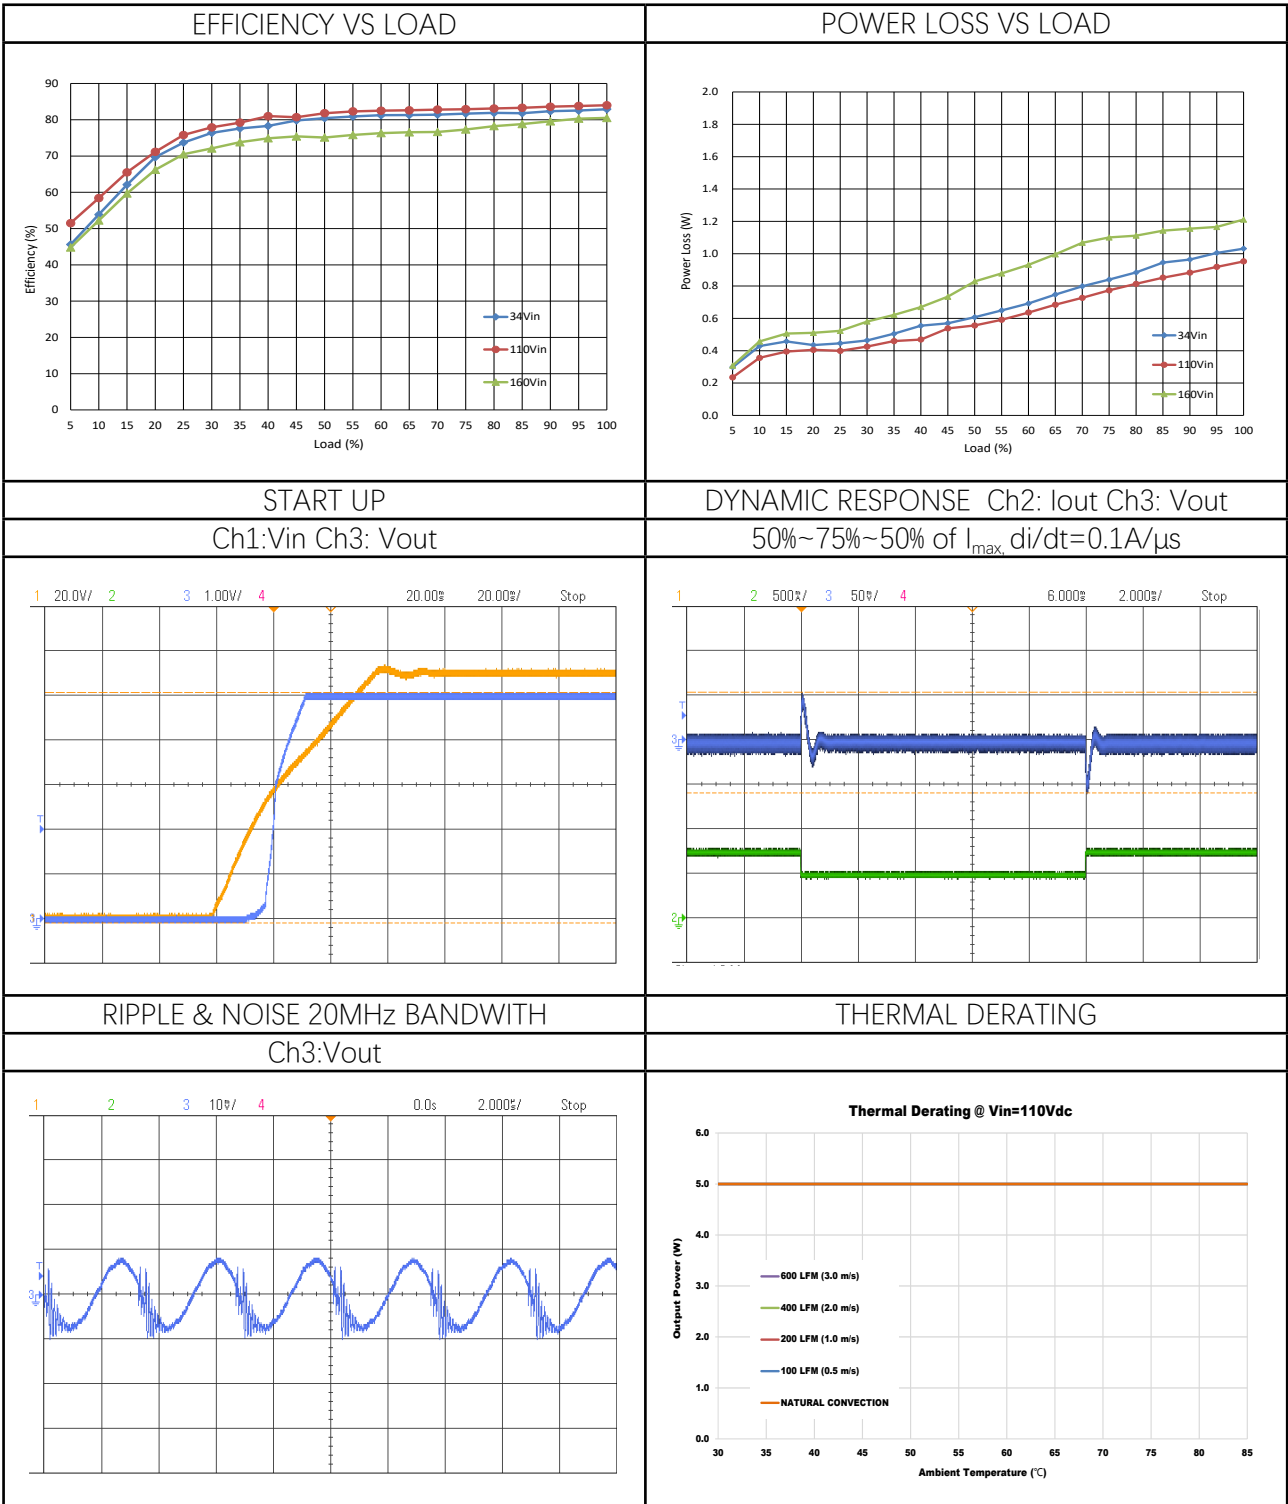

Mechanical Specifications

DLC5W110 SERIES: DIP TYPE

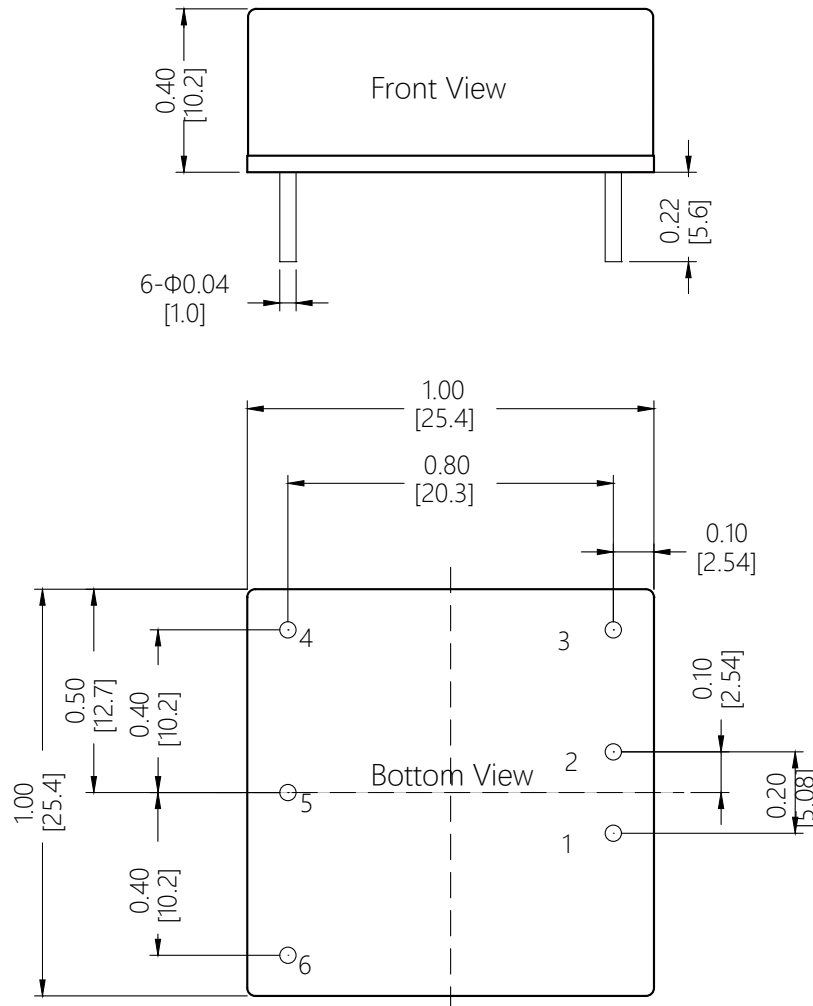

PIN:

Pin1, PIN2, PIN3, PIN4, PIN5, PIN6: $\Phi 0.040$

Force: Applied force not exceed 4.9N

Material: Copper alloy

Finish: Gold 3 ~ 5 μm (min.) over nickel 50 μm (Min.)

TOLERANCE:

X.XX= ± 0.02 (0.5)

X.XXX= ± 0.010 (0.25)

Dimensions are in inches [mm]

Weight: ~20g.


Note1: Model number with suffix "X" is without RC & TRIM Pin.

PIN CONNECTIONS


| Single Output | |
|---------------|-------------------|
| Pin | Function |
| 1 | +Vin |
| 2 | -Vin |
| 3 | RC ⁽¹⁾ |
| 4 | -Vout |
| 5 | TRIM |
| 6 | +Vout |

Mechanical Specifications

DLC5W110 SERIES: DIN-RAIL TYPE

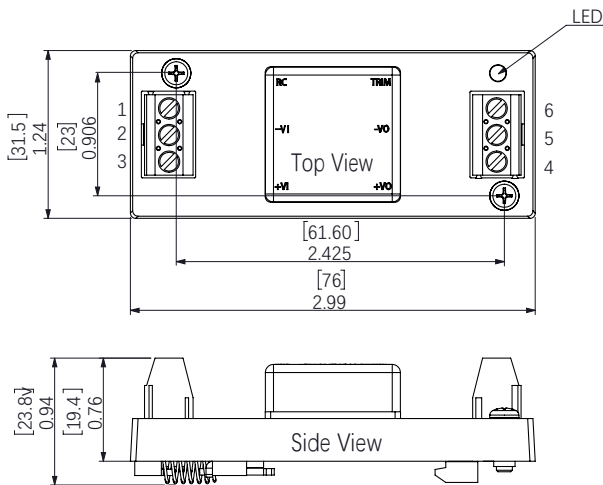

DLC5W110 SERIES: WALL MOUNT TYPE

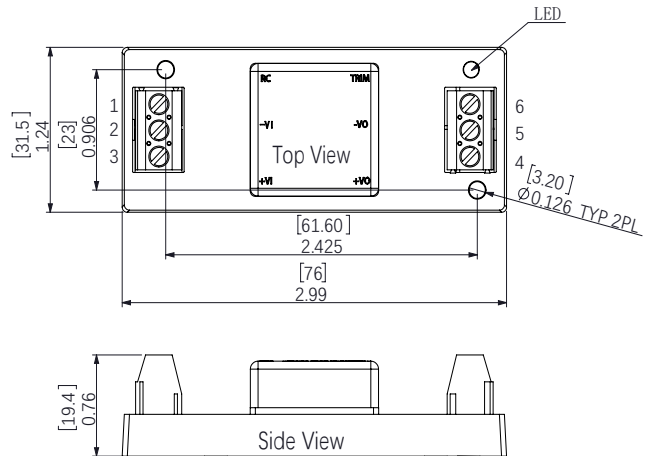

Hole screw locked torque: 0.4N·m Max
Terminal screw locked torque: 0.25N·m Max

Tolerance:
X.XX=±0.02 (0.5)
X.XXX= ±0.010 (0.25)

Dimensions are in inches [mm]

Weight:
Din-rail Type: ~65g
Wall Mount Type: ~45g.

Note1: Model number with suffix "X" is without RC & TRIM Pin.

| PIN CONNECTIONS | |
|-----------------|-----------------|
| Single Output | |
| Pin | Function |
| 1 | RC ^① |
| 2 | -Vin |
| 3 | +Vin |
| 4 | +Vout |
| 5 | -Vout |
| 6 | TRIM |

Technical Notes

INPUT FUSING

Certain applications may require fuse at the inputs of power conversion components. Fuses should also be used when there is possibility of sustained input voltage reversal which is not current limited. The DLC5W110 modules are not internally fused. We strongly recommend a slow-blown fuse to be used in the ungrounded input supply line. For safety agency approvals, the installer must install the converter in compliance with the end user safety standard.

TYPICAL APPLICATION CONNECTION

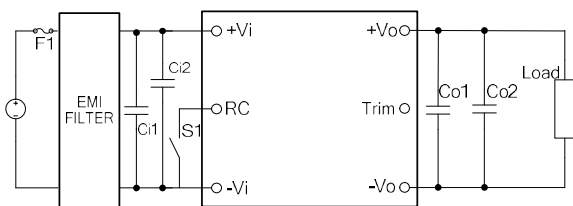


Figure 1: Typical Application Connection

In order to prevent the input line from causing the input oscillation, it is recommended to add the input capacitor close to the input of the module. Similarly, the output capacitor is added to the output of the module. Specific recommended parameters: input capacitance $C_{i1}=47\sim 100\mu\text{F}$ electrolytic capacitor. For output Capacitance, recommended value is $100\mu\text{F}/\text{A}$ (The current here refers to the output current).

REFLECTED RIPPLE CURRENT

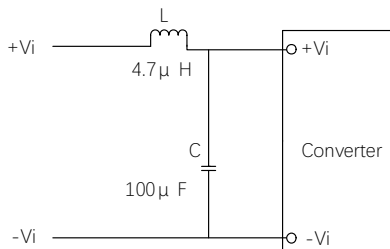


Figure 2: Reflected Ripple Current

Add LC filter at the front of the power module to

reduce the interference of reflected ripple current on the DC bus, recommended value of L and C with appropriate current and voltage rating as below: $L=4.7\mu\text{H}$; $C=100\mu\text{F}$.

CURRENT LIMITING

The output voltage remains constant as the output current increases. However, once the output current is over the specified Output DC Current Limit, the converter turns off.

The converter then enters into "hiccup mode" where it repeatedly turns on and off until the short circuit condition is removed. This prevents excessive heating of the converter or the load board.

REMOTE CONTROL FUNCTION

Module Power Remote Control or called ON/OFF pin is for the user to enable or disable the output. Control use high and low level control, there are two general control logic, positive logic or negative logic control. Recommend to use optocoupler to control ON/OFF Pin as below.

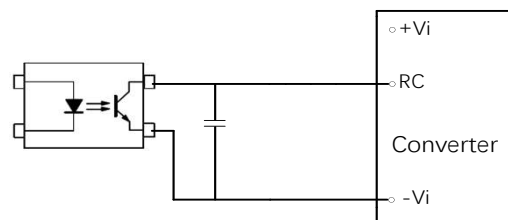


Figure 3: Remote Control

Remote Control Pin can be connected in parallel for multiple converters which with the same Remote Control characters. However, when several converters share the same remote control circuits, the total sink and source current must be taken into consideration, and make sure that the optocoupler has enough drive capability. To reduce external PCB trace interference, it is recommended to add high frequency bypass capacitor between RC pin and -Vi, recommended capacitor value is 100-1000pF.

Technical Notes

OUTPUT RIPPLE & NOISE

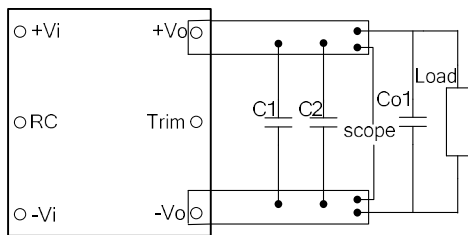


Figure 4- Output Ripple & Noise

These DLC5W110 modules' output ripple and noise is measured at the rated input voltage and output current, along with 10uF and 0.1uF MLCC used in parallel with appropriate voltage ratings and placed as C1, C2 shown in the figure above. The scope's bandwidth is set to 20MHz.

External output capacitors are required to reduce the ripple & noise. The output capacitors should be low ESR and appropriate frequency response with appropriate voltage ratings, and must be located as close to the converters as possible, also PCB layout must be taken into consideration.

INPUT UNDERVOLTAGE SHUTDOWN AND START-UP THRESHOLD

Once operating, module will not turn off until the input voltage drops below the Undervoltage Shutdown threshold. Subsequent re-start will not occur until the input is brought back up to the Start-Up Threshold. This built in hysteresis prevents any unstable on/off situations from occurring at a single input voltage.

SHORT CIRCUIT CONDITION

When the converter is in current-limit mode, the output voltage will drop as the output current demand increases and then the converter will be shut down. If the short-circuit condition persists, another shutdown cycle will be initiated. This on/off cycling is referred to as "hiccup" mode. The hiccup cycling reduces the average output current, thereby preventing internal temperatures from

rising to excessive levels. The module is capable of enduring an indefinite short circuit output condition.

OUTPUT OVERVOLTAGE PROTECTION

DLC5W110 output voltages are monitored for an overvoltage condition via magnetic feedback. The signal is coupled to the primary side and if the output voltage rises to a level which could be damaging to the load, the sensing circuitry will power down the PWM controller causing the output voltages to decrease. Following a time-out period the PWM will restart, causing the output voltages to ramp to their appropriate values. If the fault condition persists, and the output voltages again climb to excessive levels, the overvoltage circuitry will initiate another shutdown cycle.

THERMAL SHUTDOWN

These DLC5W110 converters are equipped with thermal-shutdown circuitry. If environmental conditions cause the internal temperature of the DC-DC converter to rise above the designed operating temperature, a precision temperature sensor will power down the unit. When the internal temperature decreases below the threshold of the temperature sensor, the unit will auto restart.

TRIMMING OUTPUT VOLTAGE

The DLC5W110 converters have a trim capability that allows users to adjust the output voltages. Output voltage can be trimmed up or down by a trim pin by connecting a single fixed resistor between Trim Pin and +Vo or -Vo, the output voltage can be increased or decreased depending on its connection. The maximum output voltage adjustment range is -10% to +10%. If the trim function is not used, keep TRIM pin floating.

Trim up:

Increase the output voltage by connecting an appropriate value resistor between Trim Pin and +Vo Pin. Show as below:

Technical Notes

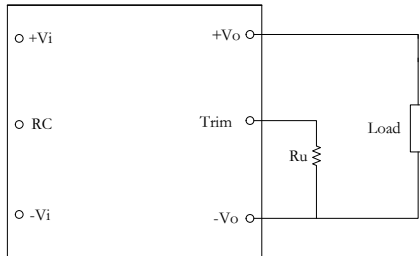


Figure 5: Trim Up Connection

Please follow up the Trim Up formula to calculate the resistor value according to the desired output voltage.

$$5V: R_u = (10.01 \times \frac{0.5}{\Delta} - 36)(k\Omega)$$

$$12V: R_u = (28.5 \times \frac{0.506}{\Delta} - 100)(k\Omega)$$

$$15V: R_u = (30 \times \frac{0.5}{\Delta} - 100)(k\Omega)$$

$$24V: R_u = (40.2 \times \frac{0.485}{\Delta} - 133)(k\Omega)$$

"Δ" is the change of output voltage, such as: 5V output is raised to 5.5V,
 $\Delta = (5.5 - 5) / 5 * 100\% = 10\%$.

Trim down:

Decrease the output voltage by connecting an appropriate value resistor between Trim Pin and -Vo Pin. Show as below:

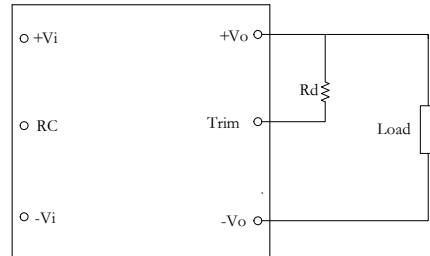


Figure 6: Trim Down Connection

Please follow up the Trim Down formula to calculate the resistor value according to the desired output voltage.

$$5V: R_d = (10.01 \times \frac{0.5 - \Delta}{\Delta} - 36)(k\Omega)$$

$$12V: R_d = (29.2 \times \frac{0.506 - \Delta}{\Delta} - 100)(k\Omega)$$

$$15V: R_d = (30.1 \times \frac{0.5 - \Delta}{\Delta} - 100)(k\Omega)$$

$$24V: R_d = (37.8 \times \frac{0.485 - \Delta}{\Delta} - 133)(k\Omega)$$

"Δ" is the amount of change in output voltage, such as: 5V output is reduced to 4.5V,
 $\Delta = (5 - 4.5) / 5 * 100\% = 10\%$.



This product is subject to the following operating requirements and the Life and Safety Critical Application Sales Policy:

Refer to: <http://www.densitypower.com>

Density Power makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without prior notice.